





Tutorial to Build PRCY Masternodes

To set up masternodes, you have to take your time and don't rush it. Mistakes are made very fast if you don't take your time.

Before you start building up masternodes, you have to disable staking in **settings**.



Step 1: Copy your wallet address in the receive tab and send exactly **5000 PRCY** to your own wallet address.

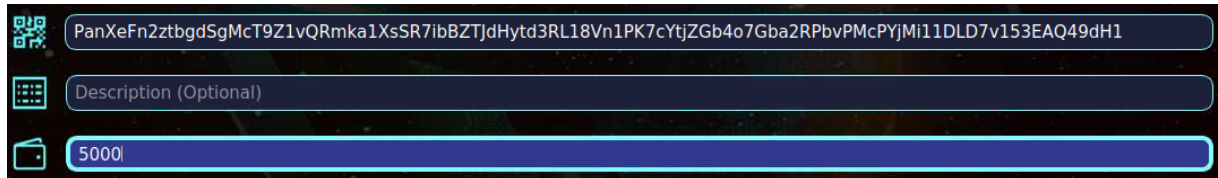

Step 2: After the transaction is completed, **press F1** to open the console. Type into the console the command **masternode outputs**. If your transaction of **5000 PRCY** went well, you will see a result from this command.


```
[
  {
    "txhash": "0eabc5ae07f786989cb509ce64a48787f851e4d8fff6578356a04191780506a44",
    "outputidx": 0
  }
]
```

Step 3: Go to [PRCY Higlan masternode](#) page and order your masternode.

CHECK YOUR ORDER

You are about to build
1 PRCY masternodes


Step 4: After your masternode is mounted on Higlan, go to your [dashboard](#) and show the data for **PRCY coin**. Click on the button **DATA TO MY WALLET** and copy the entire line.

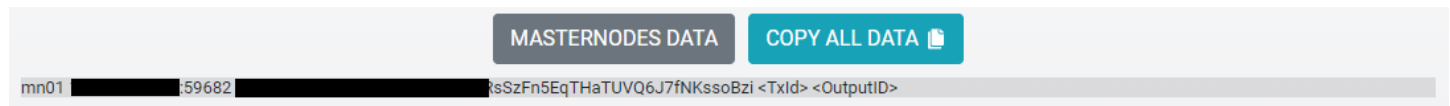

Step 5: Go to your wallet folder and open the file **masternode.conf**. Paste the line you copied in **step 4** and replace the **Txid** and **OutputId** that you made in **step 2**. Save the file **masternode.conf** and reopen your wallet.

```
mn01 [redacted]:59682 [redacted]sSzFn5EqTHaTUVQ6J7fNKssoBzi 0ebc5ae07f786989cb509ce64a48787f851e4d8fff6578356a04191780506a44 0
```

Step 6: After your wallet is open and **fully synchronized**, go to your **masternodes tab** and click with the mouse-right click on your masternode and start it.

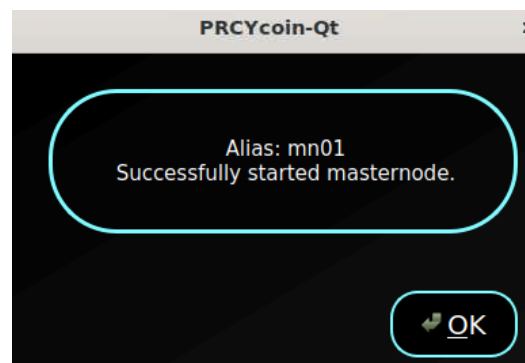

If you have any technical questions, go to [Higlan support channel](#) on Telegram.